



SENSOR BRACKET SHS75GS-135 FOR DOUBLE SHEET DETECTION

- Spring loaded sensor bracket with flat suction cup
- Strong hold on even sheets due to suction cup
- Diameter 135 mm
- For thick sheets, with P75VGS sensor



SENSOR BRACKET SHS75GS-135


Mounting of the sensor bracket:

The mounting plate of the bracket has a hole for fastening with the SHK clamping device. Other adapters may be ordered by request. Item 1 - 4 describes the mounting of the sensor into the sensor bracket and item 5 - 8 describes the mounting of the sensor bracket.




Risk of injury!
Please use gloves
while screwing in the sensor

HINT: Compress the sensor bracket
for better handling.
Eventual pull off the
vacuum hose.



Important note on
sensor adjustment!

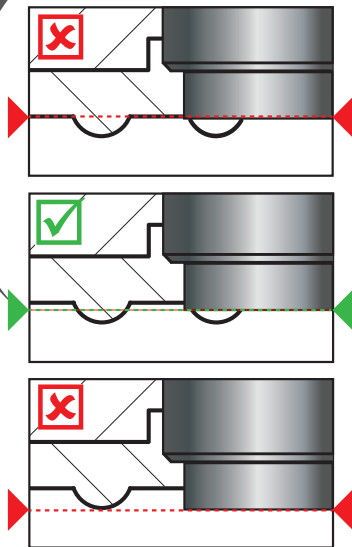

1. Lightly
grease
sealing

2. Screw in
sensor

Vacuum connection


Fixing screw
for sensor

Hexagon socket
screw size 5

Screw in the sensor by hand!

3a. Adjustment without vacuum with a ruler:



- Screw in the sensor in the bracket until the sensor face is on the same level as the rubber base. (see note on sensor adjustment)
- Now screw the sensor by a $\frac{1}{4}$ turn over the rubber base.

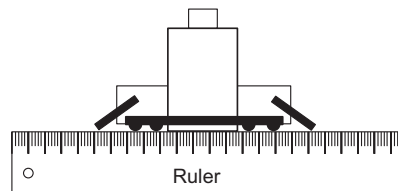


3a or 3b

3b. Adjustment with vacuum and a sheet:

- Screw in the sensor in the bracket until the sensor face is on the same level to the rubber base. (see note on sensor adjustment)
- Activate vacuum for suction of sheet. (min. 1 mm thickness)
- Screw in the sensor by hand against the sheet until it stops turning.
- Turn vacuum off.
- Turn back the sensor by a $\frac{1}{4}$ turn

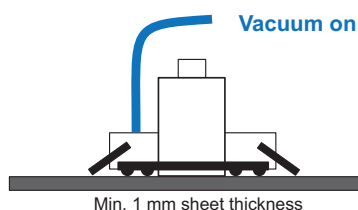


4. Fix sensor



Hexagon
socket
screw size 5

5. Connect sensor cable and vacuum hose
6. Suspend and align
7. Direct the hose towards the sensor. Make sure there is free play on the vacuum hose and cable.
8. Adjust the bracket to a position lower than the suction cups carrying the sheet.

When the sensor is put on the sheet, the bracket must compress so much that (after being lifted) it remains pressed for at least 10 mm, thus providing the necessary freedom for the belts. Only then the required mobility is achieved. The sensor bracket must not carry loads. Only small, lightweight parts can be directly transported with the sensor bracket.

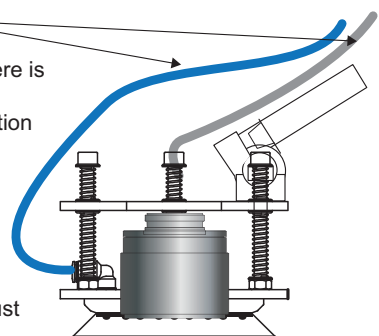


FOR DOUBLE SHEET DETECTION (SINGLE-SIDE SYSTEMS)

Technical Data SHS75GS-135

Applicable sensors	P75VGS
Diameter of suction cup	137 mm (while applying vacuum, nominal)
Spring travel	approx. 26 mm
Total height	approx. 125 mm
Pressure force at 1/2 spring travel	approx. 65 N (Pressure force and self-weight with sensor)
Weight	approx. 1800 g
Mounting of bracket	M8 tap holes in the mounting plate, use at least 2 of them for mounting
Mounting of sensor	Thread M75x1.5 clamping by screw and NBR pressure pad
Vacuum feed for suction cup	Plug fitting for outside calibrated hose 8 mm

Dimensions

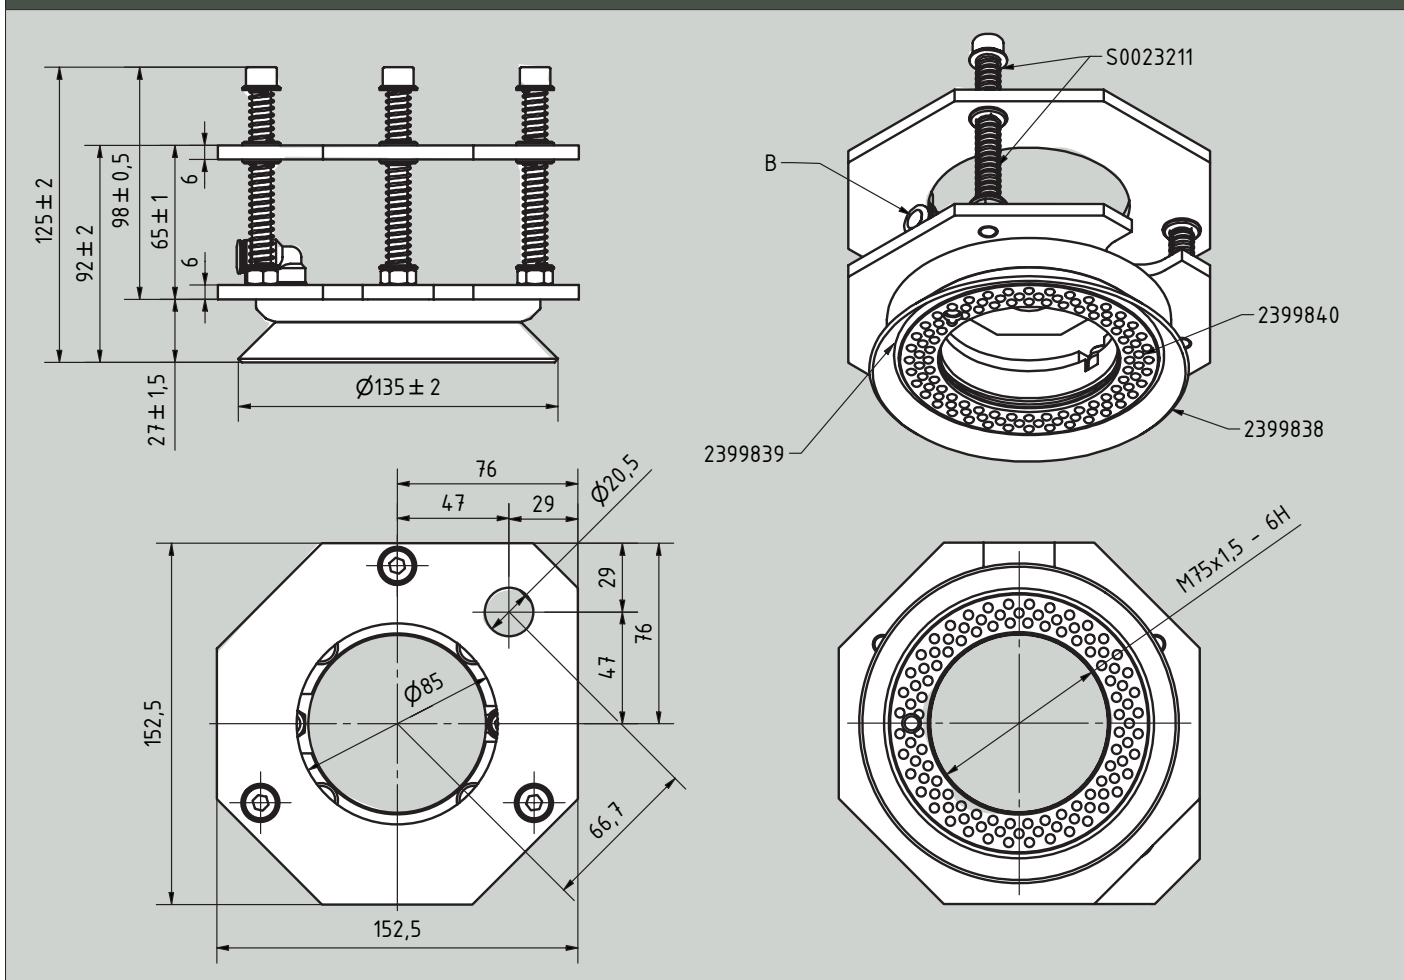

Exchange of the wearing parts:

Pull the rubber lips (**order no. 2399838**) over the lower edge.

Both sides can be used. Pay attention for undamaged sealing lips at the inner and outer edge as well as for uniform projection of the sealing edge.





The rubber pressure pad (**order no. 2399840**) is bonded permanently in the suction area with Cyanoacrylate.

Order information

Order number	Description
SHS75GS-135	Sensor bracket (complete)
SHK	SHK Bracket clamp
2399840	Rubber pressure pad
2399839	Sealing ring
2399838	Rubber lips (black)
S0023211	Spring Kit



Product program (Excerpt)

Type	SH42GS	SHS42GS	SHS42G-FB	SHX42-85F	SHX42-DL
					
Description	Spring loaded sensor bracket	Spring loaded sensor bracket with flat suction cup	Spring loaded sensor bracket with bellows suction cup	Spring loaded sensor brackets with rubber lip respectively double lip. Read the <i>NOTE</i> at the bottom for SHX42-DL!	
Fits to	P42GS P42AGS PW42GS PW42AGS				
Sensor mounting	Ø 43 mm	Thread M42 x 1.5	Thread M42 x 1.5	Thread M42 x 1.5	Thread M42 x 1.5
Total height*	98 mm plus sensor excess length	141mm	128 mm	120 mm	120 mm
Spring travel	approx. 26 mm	approx. 26 mm	approx. 34 mm	approx. 70 mm	approx. 70 mm
Weight	approx. 0.75 kg (1.65 lbs)	approx. 1.12 kg (2.46 lbs)	approx. 1.2 kg (2.64 lbs) approx. 0.75 kg (1.65 lbs) (SHS42G-FB80)	approx. 0.85 kg (1.87 lbs)	approx. 0.85 kg (1.87 lbs)
Pressure force at 1/2 spring travel	approx. 48 N	approx. 48 N	approx. 60 N	approx. 25 N	approx. 25 N
Suction cup diameter	n.a.	115 mm 85 mm (SHS42GS-85**)	105 mm 80 mm (SHS42G-FB80)	85 mm	105 mm
Vacuum feed	n.a.	Hose 8mm OD	Hose 8mm OD	Hose 8mm OD	Hose 8mm OD
Spare parts	Spring Kit 2395117	Spring Kit 2395117 Rubber lips (black) 2395110 / 2395168** Rubber pressure pad 2395109 / 2395167** Thread sealing ring 2395126	Bellows suction cup 105 mm (red) 2395045 Bellows suction cup 80 mm (red) 2395100 (SHS42G-FB80)	Strap set SHX42-STRAP-80 Rubber lips (black) 2395168 Rubber pressure pad 2395167	Strap set SHX42-STRAP-80 Bellows suction cup 105 mm (yellow) 2395218
Accessories	SHK Bracket clamp for mounting of sensor brackets to destacking tools			Adaptors: SHX-AZ2-25, SHX-AZ-BILSING, SHX-AZQ-19, SHX-AZQ-25	
Application properties					
For vertical destackers	+	+	+	+	+
For Robot-Loader and high-speed linear destackers	--	-	+	+	+
For inclined sheet stacks	-	0	+	+	++
Suction delay time***	none	0.1 s	0.5 s	0.1 s	0.1 s
Notes	For narrow sheets and applications where weight is critical	Strong hold on even sheets due to suction cup.	Suited for utmost sensor contact on inclined or undulated sheet stacks.	Highest tilt flexibility, highest spring travel. Rigid during approach. For high lateral acceleration (up to 2g), minimal wear.	
* total height unloaded ** spare parts for SHS42GS-85					
*** heavily dependent on vacuum strength, tube resistance, contact angle and contact pressure to sheet					
Never use sensor bracket as a lifting suction cup! (except sheet is smaller than area of 3 suction cups) NOTE: The colors of the suction cup points to different hardnesses: Red – 45 shore; Yellow – 55 shore; Black – 60 shore NOTE: The sensor bracket SHX42-DL is suited only for sheet thickness >0.5 mm (aluminum) and >0.3 mm (steel)					

Revision 1.0, February 2025 - Subject to technical modification and error

ROLAND ELECTRONIC GmbH

Otto-Maurer-Straße 17 75210 Keltern / Germany
 phone: +49 7236 9392-0 fax: +49 7236 9392-33
 info@roland-electronic.com www.roland-electronic.com

